


## STREET ELEVATION

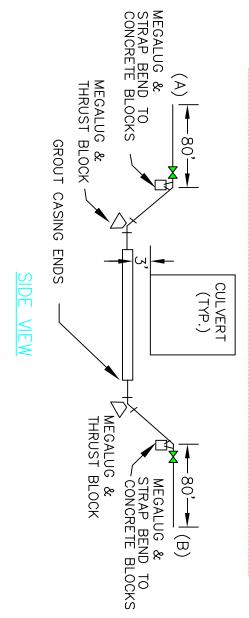

## NOTE:

- 1. ALL JOINTS BETWEEN POINT (A) & POINT (B) IS TO BE MEGALUG MECHANICALLY RESTRAINED JOINTS. SEE SECTION 02224 PART 2 2.04 FOR INSIDE CASING.
- 2. ALL 45° BENDS SHALL BE ROLLED TO ACHIEVE 5' HORIZONTAL OFF SET.

STANDARD DETAIL
FIGURE 068
CASING CARRIER PIPE
TYPICAL INSTALLATION

<u>N</u>0.

AUTHORIZED BY

REVISIONS

DATE

PUBLIC UTILITIES

RSS CC

UPDATE UPDATE

12/21/99 1/2010

SCALE: NONE